

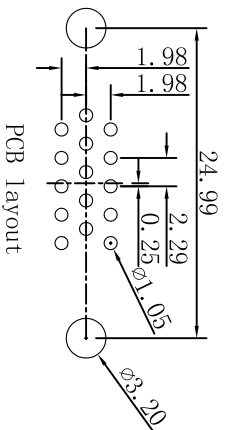
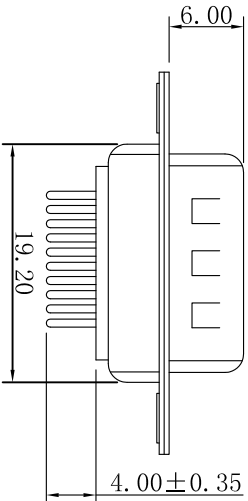


GP Component

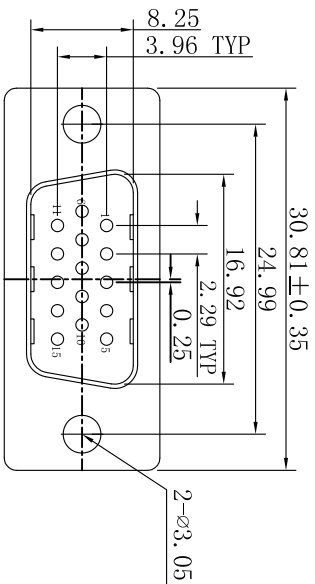

CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C~105°C
7. INSERTION/EXTRACTION FORCE PER CONTACT: 3.74Kg Max 0.33Kg Min.

01.HDP015 M X XXX XX A XXX

<p>Pin Poles 15:15PIN</p> <p>M/F Differentiates M=Male F=Female</p> <p>Hsg Color 1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple</p> <p>Plating G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"</p>	<p>B00:Bright sn</p> <p>B01:Bright sn 1U"</p> <p>B03:Bright sn 3U"</p> <p>Bxx:Bright sn XXU"</p>	<p>M00:Matte sn</p> <p>M01:Matte sn 1U"</p> <p>M03:Matte sn 3U"</p> <p>Mxx:Matte sn XXU"</p>
<p>Water Code</p> <p>Specification Type</p> <p>Hsg Material</p>	<p>H1=PB1 HF</p> <p>H4=PA66 HF</p> <p>10=PB1</p> <p>13=PA66</p>	<p>H2=PA6T HF</p> <p>H5=LCF</p> <p>11=PA6T</p> <p>12=PA9T</p> <p>14=PA46</p>

Specification Type

A	B	C	D

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.13	m t

<p>UNIT: mm [inch]</p> <p>TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°</p> <p>SCALE:1:1 SIZE:A4</p>	<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co.,Ltd</p>	<p>DESIGN: 李涛 2020.12.13</p> <p>CHECKED: 李涛 2020.12.13</p> <p>APPROVED: 李涛 2020.12.13</p>	<p>PART NAME: HDP 15M系列图</p> <p>PART NO. 01.HDP015MXXXXXXXXXX</p> <p>DRAW NO.</p> <p>SHEET NO. 01 OF 01</p>
--	---	---	---